



**NEW** 



- ☑ STRONGER THAN STAINLESS STEEL
- FOR OUTDOOR USE
- EXTRA LOW RESISTANCE

- INNOVATIVE CORE THREAD TO PREVENT SPLITTING
- ☑ FAST GRIP START



AVAILABLE IN: 3.5, 4.0, 5.0 AND 6.0 MM IN VARIOUS LENGTHS

## **EXTRAORDINARY** COATED













SILVERMATE - CHIPBOARD SCREWS POZI ZINC PLATED


ĺ	F	U		L			l				2				١

					FULL I	HKEAD
1	DIA		LENGTH	RECESS		
			TOTAL			
	3.0	χ		PZ-1		
	3.0	χ	16 20 25 30 35	PZ-1		
	3.0 3.0 3.0 3.0 3.5 3.5 3.5 3.5 3.5 3.5 4.0	χ	25	P7-1		
	3.0	χ	30	PZ-1		
	3.0	χ	35	PZ-1 PZ-1 PZ-1 PZ-1 PZ-2		
	3.0	χ		PZ-1		
	3.5	χ	40 16 17 20 25 30 35 40 16 20 25 30 33 40 45 60	PZ-2		
	3.5	χ	17	PZ-2		
	3.5	χ	20	PZ-2 PZ-2 PZ-2 PZ-2		
	3.5	χ	25	PZ-2		
	3.5	χ	30	PZ-2		
	3.5	χ	35	PZ-2		
	3.5	χ	40	PZ-2		
	4.0	Χ	16	PZ-2 PZ-2 PZ-2 PZ-2		
	4.0	Χ	20	PZ-2		
	4.0 4.0	Χ	25	PZ-Z		
	4.0	Χ	30	PZ-2		
	4.0	χ	35	PZ-2		
	4.0	Χ	40	PZ-2		
	4.0 4.0	Χ	45	PZ-2		
	4.0	X	50	PZ-2 PZ-2 PZ-2 PZ-2 PZ-2		
	4.0	Χ	60	PZ-2		
	4.0 4.5 4.5 4.5 4.5	Χ	70 30 35 40	PZ-2 PZ-2 PZ-2 PZ-2 PZ-2		
	4.5	X	30	PZ-2		
	4.5	X	35	PZ-2		
	4.5	X	40	PZ-2		
	4.5	X	45	PZ-2		
	4.5 4.5 5.0 5.0	X	50	PZ-2		
	4.5	X	60	PZ-2 PZ-2 PZ-2 PZ-2 PZ-2		
	5.0	X	20	PZ-2		
	5.0	X	25	PZ-2		
	5.0	X	30	PZ-2		
	5.0	X	45 50 60 22 25 30 35 40 60	D/-')		
	5.0	X	40	PZ-2 PZ-2		
	5.0 5.0 5.0	X	50	PZ-Z		
		X		PZ-2		
	6.0	X	40	PZ-3		
	6.0	X	50	PZ-3		



A balanced range of chipboard screws, also produced in a chromium-6 free galvanized version, offers extremely wide coverage of all needs. By using only 3 Pozi- and 3 Torx®-versions across the range, bit changes will be less frequent, thus saving time. The SilverMate, having the CE approval mark and issued with an ETA, is packed in a sturdy professional box featuring an easy access tray.

Improved milling ribs ensure a perfect damage-free finish. An extremely sharp point, combined with the improved thread, ensures rapid engagement in the wood with a minimal splitting risk. The SilverMate is the strongest chipboard screw in its class, making it suitable for mounting into almost any type of wood. Sophisticated shaft ribs on the partial thread version and a superior wax also ensure minimal turn-in-resistance.

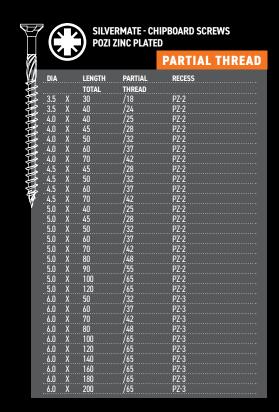

DIA ø	3.0	3.5	4.0	4.5	5.0	6.0
	Tx-10		Tx	-20		Tx-30







**IN ITS CLASS** 



**OPTIMAL PITCH PER** DIAMETER AND LENGTH SILVERMATE - CHIPBOARD SCREWS **TORX® ZINC PLATED** 

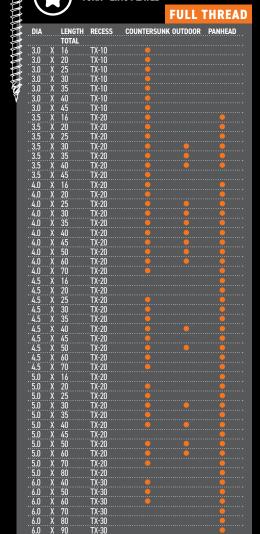

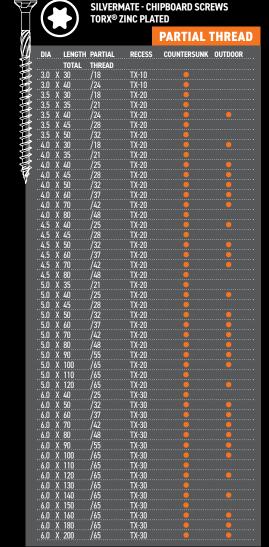

**EXTRA LOW** RESISTANCE

**INNOVATIVE CORE THREAD TO PREVENT SPLITTING** 

**FAST GRIP START**